


Quotation: Power tube fan 36" single or phase 115 VAC/240 VAC, 1/2hp, suspended mounting. Great for fresh air or heat distribution across long distances up to 400' (30" pre punched poly duct). Available in 18" dia and 24"/30" dia (all direct drive drive). Longer tubes are available. Duct length must be specified before ordering fan/tube combo. 24" fan has maximum 4850 CFM output, 18" has 3650 CFM output.

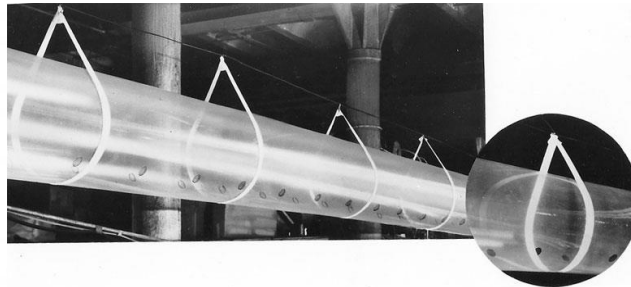

Suspended mount tube fan

36" stainless steel fan 10,000 CFM at 0.10 sp, suspended mount
Deep pitched blades for maximum air flow
Heavy gauge steel barrel, sealed bearings
1/2 Hp motor, direct drive totally enclosed, 6A/3A 115/230 vac 1 phase
6 blades polypropylene fan blade for high air efficiency
38.875" by 38.875" square frame with all mounting instructions
36" to 30" transition, light gauge galvanized with a steel strap
100' of polyethylene clear tube and mounting clips/straps (1 per 5') are included
Tube Hangers are made of an extremely strong, tear resistant woven
Easy to mount
Weight 60 lbs each
1 year manufacturer defects warranty
Made in USA

Please allow 4-5 weeks for delivery **shipping to location included.**

Exclusions: Actual physical installation of the fan and ducting/electrical hook up is not included, additional mounting hardware may be needed- not included, motorized louver not included, motor starter not included. Hangers hang from a suspended steel line – not included. Additional duct length plus hangers at additional cost. For longer duct lengths duct is pre punched accordingly (needs to be calculated).

Robert Drozdowski

Robert Drozdowski

rdrozdowski@agricontrol.com

Cell. 901-4174785

Fax. 901-339-0166

ACT/BTU SE USA Division in Memphis, TN